


26 443 LS0 RAINSHOWER SYSTEM SMARTCONTROL DUO 360 COMBI SHOWER SYSTEM WITH THERMOSTAT, EXPOSED/CONCEALED

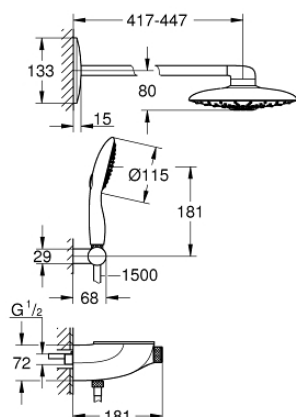

PRODUCT DESCRIPTION

- Tyc: moon white/chrome
- consisting of:
 - exposed/concealed SmartControl thermostat
 - allows change between:
 - head shower Rainshower Duo 360 with horizontal 450 mm shower arm, spray plate white
 - GROHE PureRain/GROHE Rain O² spray* and TrioMassage
 - maximum flow rate (at 3 bar): 21 l/min
 - hand shower Power&Soul 115, spray plate white (27 671)
 - maximum flow rate (at 3 bar): 7.5 l/min
 - hand shower wall holder (27 055)
- Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)
- minimum flow rate 10 l/min
- GROHE DreamSpray perfect spray pattern
- GROHE Long-Life finish
- GROHE CoolTouch no risk of scalding
- GROHE TurboStat compact cartridge with wax thermoelement
- GROHE Water Saving - Less water, perfect flow
- GROHE SafeStop safety button at 38°C (calibration required)
- GROHE SafeStop Plus optional temperature limiter at 43°C included
- GROHE SmartControl push for ON-OFF, turn for volume adjustment from GROHE Water Saving to Full Flow
- GROHE EasyReach shower tray
- SpeedClean anti-limescale system
- Inner WaterGuide for a longer life
- TwistStop to prevent hose from twisting
- requires rough-in set 26 264 and concealed unit 26 449 – all to be ordered separately
- * to be decided at first installation; factory default setting: GROHE PureRain
- GROHE Long-Life finish