


26 443 LS0 RAINSHOWER SYSTEM SMARTCONTROL DUO 360 COMBI SHOWER SYSTEM WITH THERMOSTAT, EXPOSED/CONCEALED

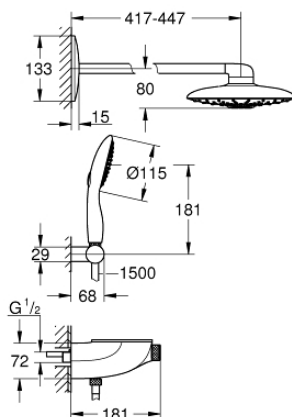

PRODUCT DESCRIPTION

- Tyc: moon white/chrome
- consisting of:
 - exposed/concealed SmartControl thermostat
 - allows change between:
 - head shower Rainshower Duo 360 with horizontal 450 mm shower arm, spray plate white
 - spray patterns: GROHE PureRain/GROHE Rain O² spray* and TrioMassage
 - maximum flow rate (at 3 bar): 21 l/min
- hand shower Power&Soul 115, spray plate white (27 671)
 - maximum flow rate (at 3 bar): 7.5 l/min
- hand shower wall holder (27 055)
- Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)
 - minimum flow rate 10 l/min
- GROHE DreamSpray - perfect spray pattern
- GROHE LongLife finish
- GROHE CoolTouch - no risk of scalding
- GROHE TurboStat - compact cartridge with wax thermoelement
- GROHE EcoJoy - Less water, perfect flow
- GROHE SafeStop safety button at 38°C (calibration required)
- GROHE SafeStop Plus - optional temperature limiter at 43°C included
- GROHE SmartControl - control the shower with intuitive push/turn button
- GROHE EasyReach shower tray
- GROHE SpeedClean - effortless limescale removal
- Inner WaterGuide - inner insulation for surface protection
- TwistStop - to prevent hose from twisting
- requires rough-in set 26 264 and concealed unit 26 449 – all to be ordered separately
- * to be decided at first installation; factory default setting: GROHE PureRain
- GROHE LongLife finish