
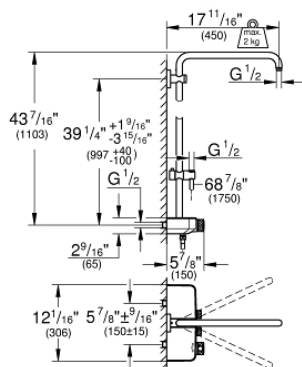


26 511 000 EUPHORIA SMARTCONTROL SYSTEM MONO SHOWER SYSTEM WITH THERMOSTAT FOR WALL MOUNTING

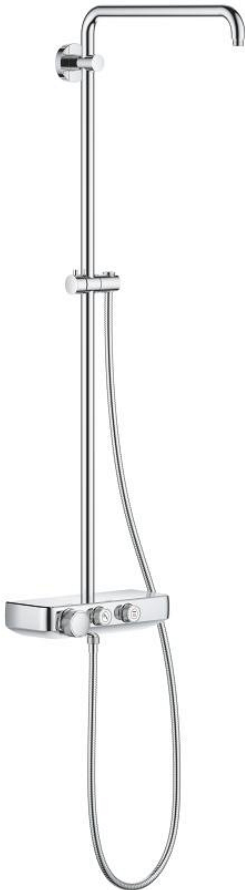

PRODUCT DESCRIPTION

- Tyc: Chrome
- consisting of:
 - horizontal 450 mm shower arm*
 - upper bracket adjustable for minimal adaption to existing drilling holes
 - exposed SmartControl thermostat
- allows change between:
 - head shower and hand shower (to be ordered separately)**
- maximum flow rate (at 3 bar): 26 l/min
- with ball joint
- rotation angle $\pm 15^\circ$
- adjustable in height with gliding element
- Rotaflex Metal Long-Life TwistStop shower hose 1750 mm (28 025)
- GROHE DreamSpray - perfect spray pattern
- GROHE LongLife finish
- GROHE CoolTouch - no risk of scalding
- GROHE TurboStat - compact cartridge with wax thermoelement
- GROHE ProGrip - with knurl structure
- GROHE SafeStop at 38°C
- GROHE SafeStop Plus - optional temperature limiter at 43°C included
- GROHE SmartControl - control the shower with intuitive push/turn button
- integrated GROHE EasyReach shower tray
- GROHE SpeedClean - effortless limescale removal
- Inner WaterGuide - inner insulation for surface protection
- TwistStop - to prevent hose from twisting
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min
- * weight of head shower up to 2 kg acceptable
- ** recommendation: Euphoria 260 SmartControl 6 l/min (26 456), Euphoria Massage 6.4 l/min (26 513 000)