
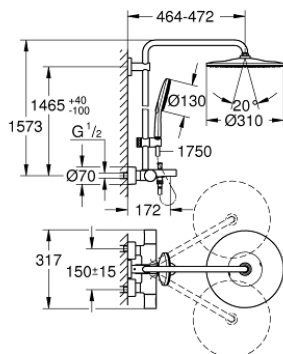


26 657 000 RAINSHOWER SMARTACTIVE 310 SHOWER SYSTEM WITH BATH THERMOSTAT FOR WALL MOUNTING

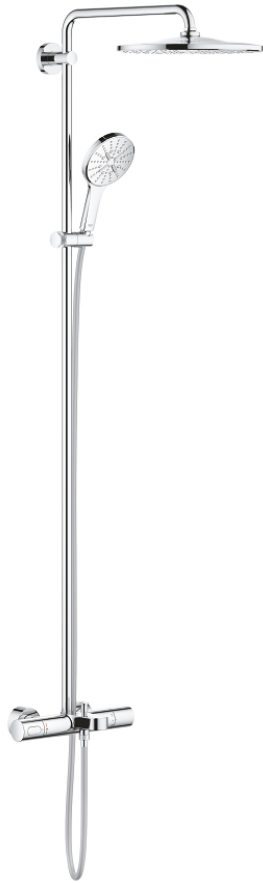

PRODUCT DESCRIPTION

- Tyc: Chrome
- consisting of:
 - horizontal swivable 450 mm shower arm
 - exposed thermostat with Aquadimmer function
 - allows change between:
 - head shower Rainshower Mono 310
 - maximum flow rate (at 3 bar): 7.5 l/min
 - with ball joint
 - rotation angle $\pm 15^\circ$
- bath inlet
- separate diverter for hand shower
- hand shower Rainshower SmartActive 130
 - maximum flow rate (at 3 bar): 8.5 l/min
 - adjustable in height with gliding element
 - including performance grip
- Silverflex shower hose 1750 mm
 - maximum flow rate system (at 3 bar): 8.5 l/min (without bath inlet)
- GROHE TurboStat - compact cartridge with wax thermoelement
- GROHE EcoJoy - Less water, perfect flow
- GROHE SafeStop safety button at 38°C (calibration required)
- GROHE SafeStop Plus - optional temperature limiter at 43°C included
- GROHE CoolTouch - no risk of scalding
- GROHE DreamSpray - perfect spray pattern
- GROHE SmartTip showering spray selection via push of a ring
- GROHE LongLife finish
- Flexible Installation - 1 adjustable bracket for existing drill holes
- GROHE SpeedClean - effortless limescale removal
- Inner WaterGuide - inner insulation for surface protection
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min