
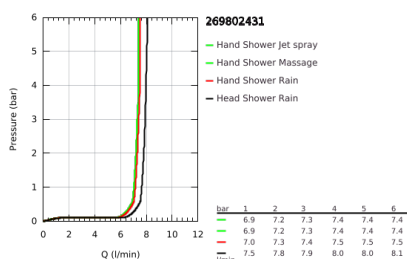


## 26 980 243 1 TEMPESTA SYSTEM 250 FLEX SHOWER SYSTEM WITH DIVERTER FOR WALL MOUNTING

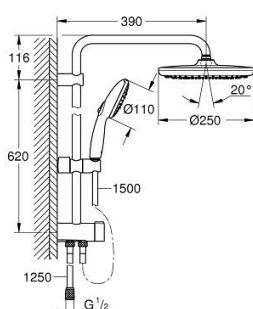

### PRODUCT DESCRIPTION

- Colour: matte black
- consisting of:
  - horizontal 390 mm shower arm, adjustable before installation
  - change by diverter between hand shower, head shower or head shower Eco setting
  - head shower Tempesta 250
  - 2 spray patterns (via diverter): Rain, SmartRain
  - AquaCalibrator limits maximum flow rate (at 3 bar): 7.9 l/min
  - head shower with black rear cover
  - with ball joint, rotation angle  $\pm 10^\circ$
  - hand shower Tempesta 110
  - spray patterns: Rain, Jet, Massage
  - maximum flow rate (at 3 bar): 7.4 l/min
  - adjustable in height with gliding element
  - distance between diverter and upper bracket: 620 mm
  - shower hose Relexaflex 1500 mm 1/2" x 1/2"
  - shower hose Relexaflex 1250 mm 1/2 x 1/2"
- flexible installation: connection to faucet / wall union for water supply with 1/2" thread of the 1250 mm shower hose
- AquaCalibrator limits maximum flow rate of system (at 3 bar): 7.9 l/min
- GROHE EcoJoy - less water, perfect flow
- GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
- GROHE DreamSpray - perfect spray pattern
- ShockProof silicone ring prevents damage caused by a shower falling
- GROHE SpeedClean - effortless limescale removal
- Inner WaterGuide - inner insulation for surface protection
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min
- min. recommended pressure 1.0 bar
- professional exclusive