
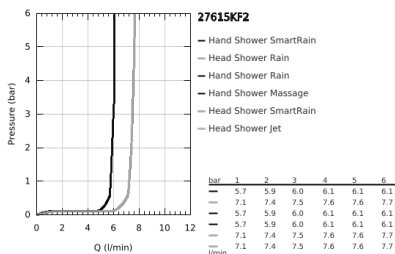


27 615 KF2 EUPHORIA SYSTEM 260 SHOWER SYSTEM WITH THERMOSTATIC MIXER FOR WALL MOUNTING

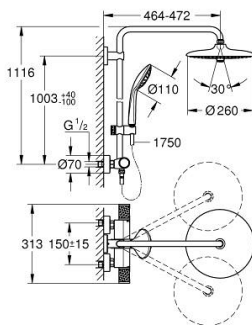

PRODUCT DESCRIPTION

- Colour: phantom black
- consisting of:
 - horizontal swivable 450 mm shower arm
 - exposed thermostat with Aquadimmer function
 - allows change between:
 - head shower Euphoria 260
 - spray patterns: Rain, SmartRain, Jet
 - maximum flow rate (at 3 bar): 7.5 l/min
 - with ball joint
 - rotation angle $\pm 15^\circ$
 - hand shower Euphoria 110 Massage
 - spray patterns: Rain, Massage, SmartRain
 - maximum flow rate (at 3 bar): 8.5 l/min
 - adjustable in height with gliding element
 - shower hose Silverflex 1750 mm 1/2" x 1/2" (28 388)
 - AquaCalibrator limits maximum flow rate of system (at 3 bar): 8.5 l/min
 - GROHE EcoJoy - less water, perfect flow
 - GROHE TurboStat - compact cartridge with wax thermoelement
 - GROHE SafeStop - safety button at 38°C
 - GROHE SafeStop Plus - optional temperature limiter at 43°C included
 - GROHE CoolTouch - no risk of scalding
 - GROHE ProGrip - with knurled structure
 - GROHE DreamSpray - perfect spray pattern
 - GROHE SprayDimmer - stepless flow rate adjustment
- Flexible Installation - 1 adjustable bracket for existing drill holes
- Inner WaterGuide - inner insulation for surface protection
- GROHE SpeedClean - effortless limescale removal
- TwistStop - to prevent hose from twisting
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min
- optional upgrade: GROHE EasyReach tray (26 362), sold separately
- professional exclusive