


## 27 615 KF2 EUPHORIA SYSTEM 260 SHOWER SYSTEM WITH THERMOSTATIC MIXER FOR WALL MOUNTING

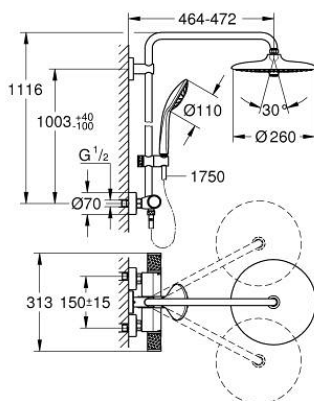

### PRODUCT DESCRIPTION

- Tyc: phantom black
- consisting of:
  - horizontal swivable 450 mm shower arm
  - exposed thermostat with Aquadimmer function
  - allows change between:
    - head shower Euphoria 260
    - spray patterns: Rain, SmartRain, Jet
    - maximum flow rate (at 3 bar): 7.5 l/min
  - with ball joint
  - rotation angle  $\pm 15^\circ$
  - hand shower Euphoria 110 Massage
  - spray patterns: Rain, Massage, SmartRain
  - maximum flow rate (at 3 bar): 8.5 l/min
  - adjustable in height with gliding element
  - shower hose Silverflex 1750 mm 1/2" x 1/2" (28 388)
  - AquaCalibrator limits maximum flow rate of system (at 3 bar): 8.5 l/min
  - GROHE EcoJoy - Less water, perfect flow
  - GROHE TurboStat - compact cartridge with wax thermoelement
  - GROHE SafeStop safety button at 38°C ( calibration required )
  - GROHE SafeStop Plus - optional temperature limiter at 43°C included
  - GROHE CoolTouch - no risk of scalding
  - GROHE ProGrip - with knurled structure
  - GROHE DreamSpray - perfect spray pattern
  - GROHE SprayDimmer - stepless flow rate adjustment
- Flexible Installation - 1 adjustable bracket for existing drill holes
- Inner WaterGuide - inner insulation for surface protection
- GROHE SpeedClean - effortless limescale removal
- TwistStop - to prevent hose from twisting
- suitable for instantaneous heaters from 18 kW/h
- minimum flow rate 5 l/min
- optional upgrade: GROHE EasyReach tray (26 362), sold separately
- professional exclusive